WINPAK

TOTAL PACKAGING SOLUTIONS

PHOENIX

Winpak Lane, Inc.
1365 N. Ayala Drive, Rialto, CA 92376 USA   Tel: 909.885.0715   Fax: 909.381.1934
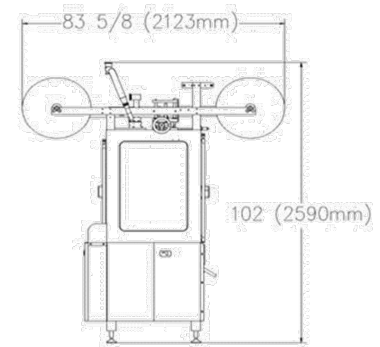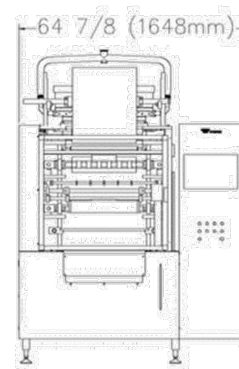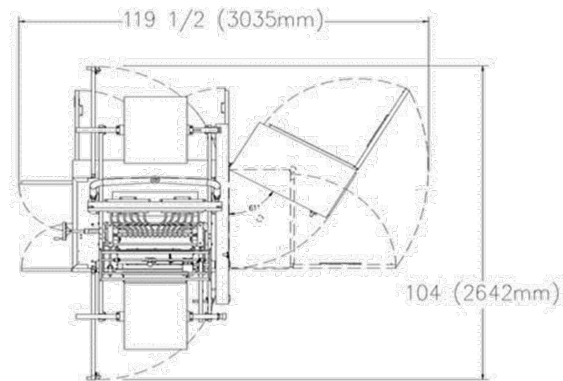Email: sales2@winpak.com
www.winpak.com

The Winpak Lane Phoenix is a high output vertical-form-fill-seal pouch/sachet packaging machine. The worlds largest food companies use Winpak Lane machines exclusively as they are well known for their high output, efficiency and quality. With production rates over 1600 sachets per minute and built for continuous use, (often 24 hours per day, 6 days per week), the PhoeniX is the highest output machine sold today. Designed, manufactured and built in Southern California. Winpak Lane is the prerequisite for today's competitive environment.

Features Include:

- Precision servo drive system
- Accurately fills a wide variety of products
- "Atmospheric Control" option provides a reliable hot-fill solution
- Film web width of up to 20" (508 mm)
- Particulates up to 1/2" (12 mm)
- Product tank , valve, and piping options available
- Change parts available to convert to three-sided seal ("stick pack")
- User-friendly packaging features and options such as notches, perforations, pouring spouts, etc.
- Save each recipe by SKU for quick repeatable changeovers
- Powered knife height adjustment
- Tool-less fill tube height adjustment

Phoenix	
FILM WIDTH	Up to 20" (508 mm)
PACKAGES PER CYCLE	2 to 14
PACKAGE WIDTHS	Minimum 1.36" (34.5 mm) Maximum 9" (228.6 mm)
PACKAGE LENGTHS	Minimum 2" (50 mm) Maximum 12" (305 mm)
CYCLES PER MINUTE	15 to 120
FILL VOLUME RANGE	Minimum 0.1 fl. oz. (3 ml) Maximum 32 fl. oz. (946 ml)
FILL TEMPERATURE RANGE	Minimum 34° F (1° C) Maximum 195° F (90° C)

Phoenix options include:

- Front and back registration systems
- Splice detector
- Specialized low viscosity fillers
- Thermal transfer or ink jet coding
- Packaging flow control gate

119 1/2 (3035mm)

104 (2642mm)

64 7/8 (1648mm)

83 5/8 (2123mm)

102 (2590mm)