

WP-20 POUCH MACHINE




The Winpak Lane WP-20 is a high-output vertical/form/fill/seal pouch machine. It uses the highly efficient Winpackage® system, resulting in more than a 10% reduction in packaging material usage. The WP-20 is a revolutionary pouch machine capable of producing up to 600 packages per minute.

Features include:

- Precision servo-drive system
- Accurately fills a wide variety of products
- Single film roll allows for front and rear package to be graphically registered for maximum exposure.
- Particulates up to 1/4" (7 mm)
- Product recipe feature for fast changeovers
- Product tank, valve, and piping options available
- CIP capable filling system available
- User friendly packaging features and options such as notches, perforations, pouring spouts, etc.
- Remote electrical troubleshooting capable
- Field-configurable optional controls

| WP-20 | |
|------------------------|--|
| FILM WIDTH | Up to 21.6" (548.64 mm) |
| PACKAGES PER CYCLE | 4 to 10 |
| PACKAGE WIDTHS | Minimum 1" (25.4 mm) Maximum 2.66" (67.56 mm) |
| PACKAGE LENGTHS | Minimum 2" (50 mm) Maximum 9" (228 mm) |
| CYCLES PER MINUTE | 15 to 75 |
| FILL VOLUME RANGE | Minimum 0.1 fl. oz. (3 ml) Maximum 5 fl. oz. (142 ml) |
| FILL TEMPERATURE RANGE | Minimum 34°F (1°C) Maximum 195°F (90°C) |

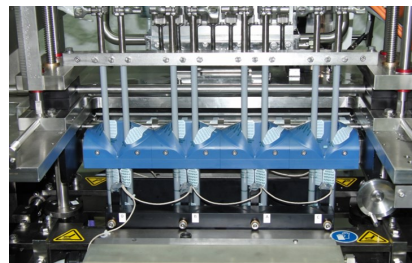

WP-20 options include:

- Convertible to 4 side seal (W-18)
- Splice detector
- Specialized low viscosity fillers
- Ink jet or thermal transfer date coding
- Package discharge gate

Tel: 909.885.0715 Fax: 909.381.1934 Email: sales2@winpak.com