



Winpak Lane, Inc.

1365 N. Ayala Drive, Rialto, CA 92376 USA Tel: 909.885.0715 Fax: 909.381.1934

Email: sales2@winpak.com



www.winpak.com

The Winpak WP-32 is a high-output vertical/form/fill/seal pouch machine. The WP-32 uses the highly efficient Winpackage® system, resulting in more than a 10% reduction in packaging material usage. The WP-32 is a revolutionary pouch machine capable of producing up to 960 packages per minute.

- Precision servo-drive system
- Accurately fills a wide variety of products
- "Atmospheric Control" option provides a reliable hot-fill solution
- Particulates up to 1/2" (13 mm)
- Product recipe feature for fast changeovers
- Product tank, valve, and piping options available
- CIP capable filling system available
- User friendly packaging features and options such as notches, perforations, pouring spouts, etc.
- Remote electrical trouble shooting capable
- Individual temperature controls
- 3A Dairy Certified
- Field-configurable optional controls



WP-32	
FILM WIDTH	Up to 32" (812.8 mm)
PACKAGES PER CYCLE	4 to 12
PACKAGE WIDTHS	Minimum 1.3" (33.2 mm) Maximum 4" (101.6 mm)
PACKAGE LENGTHS	Minimum 2" (50 mm) Maximum 9" (228 mm)
CYCLES PER MINUTE	15 to 80
FILL VOLUME RANGE	Minimum 0.1 fl. oz. (3 ml) Maximum 10 fl. oz. (285 ml)
FILL TEMPERATURE RANGE	Minimum 34°F (1°C) Maximum 195°F (90°C)

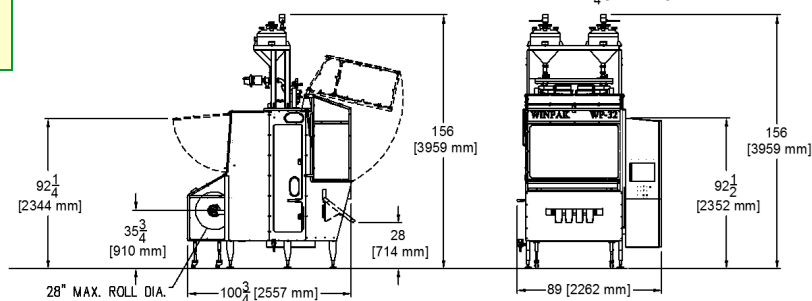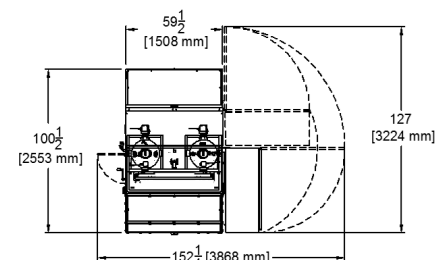

Other WP-32 options include:

- Splice detector
- Specialized low viscosity fillers
- Coding
- Package flow control gate



Winpak Lane, Inc.

1365 N. Ayala Drive, Rialto, CA 92376 USA Tel: 909.885.0715 Fax: 909.381.1934

Email: sales2@winpak.com

www.winpak.com